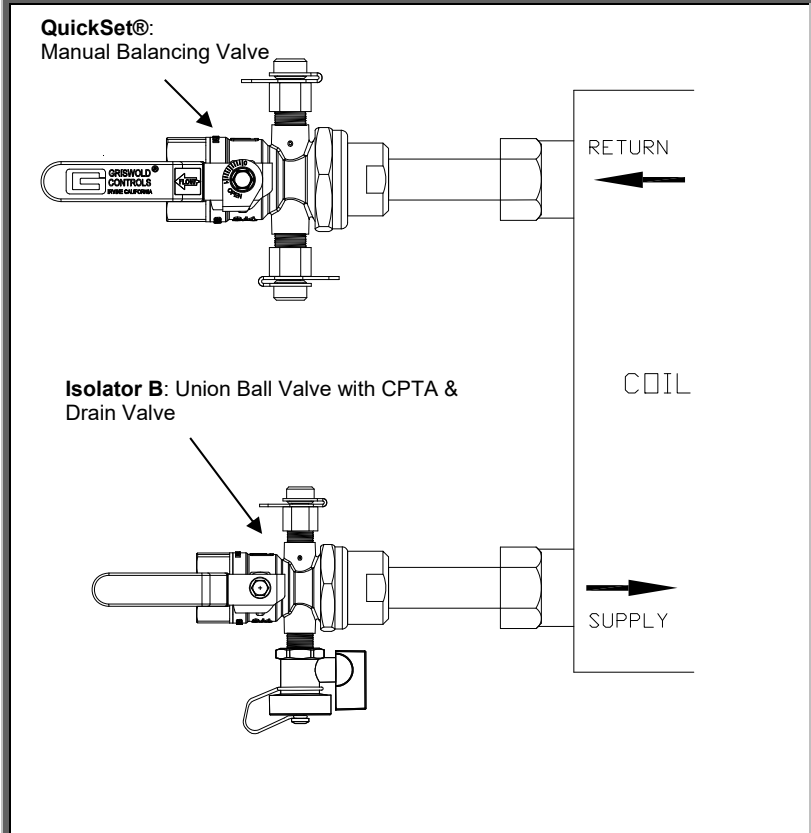


ALL CONNECTIONS ARE LINE SIZE

 <p>QuickSet®: Manual Balancing Valve</p> <p>Isolator B: Union Ball Valve with CPTA & Drain Valve</p>	<p>END CONNECTIONS:</p> <p><input type="checkbox"/> FNPT <input type="checkbox"/> SWT</p> <p><input type="checkbox"/> FNPT x MNPT</p> <hr/> <p>LINE SIZE:</p> <p><input type="checkbox"/> 1/2" - 3/4"</p> <p><input type="checkbox"/> 3/4"L - 1"</p> <p><input type="checkbox"/> 1-1/4" - 1-1/2"</p> <p><input type="checkbox"/> 2"</p> <hr/> <p>COMPONENT OPTIONS:</p> <p><input type="checkbox"/> Extension Kit</p> <hr/> <p>HOSE OPTIONS</p> <p>Type:</p> <p><input type="checkbox"/> F.R. SS Hose <input type="checkbox"/> Insulated</p> <p>Length</p> <p><input type="checkbox"/> 12" <input type="checkbox"/> 18" <input type="checkbox"/> 24" <input type="checkbox"/> 36"</p> <hr/> <p>TEMPERATURE CONTROLS:</p> <p>Not Applicable</p>
---	--

Specifications

QuickSet®: Forged brass (ASTM B283) manual balancing valve with brass venturi insert and graduated memory stop. Valve housing includes Teflon seals and Nickel plated full port ball. Valve includes one fixed end (FNPT or SWT) connection and one union (FNPT or SWT) connection. Union end includes union nut and EPDM o-ring. Valve body has two 1/4" ports, with one combination Pressure/Temperature Test Valve and Manual Air Vent (CPTA), and one Drain Valves. Valve is fully assembled. PSI/Temperature Rating: 400 PSI / 250°F.

Isolator B: Forged brass (ASTM B283) union ball valve. Valve housing includes Teflon seals and Nickel plated full port ball. Valve includes one fixed end (FNPT or SWT) connection and one union (FNPT or SWT) connection. Union end includes union nut and EPDM o-ring. Vertically mounted valve body has two 1/4" tapped ports with one combination Pressure/Temperature Test Valve and Manual Air Vent (CPTA) and one Drain Valve. Valves are fully assembled. PSI/Temperature Rating: 400 PSI / 250°F.

Drain Valve: Rated 275 PSI / 250°F. Brass housing, Nickel plated ball. 3/4" NPSH hose connection.

Pressure/Temperature Test Valve: Rated 1000 PSI / 350°F. Brass Housing, Nordel Seal.

Combination Pressure/Test Valve & Manual Air Vent (CPTA): Pressure/Temperature Test Valve works in conjunction with valve body feature to function as Manual Air Vent. Requires both components to operate.

CPP-1QIB PACKAGES

Model Number Selection:

Size	Model Number- FNPT	Model Number- SWT	Model Number- FNPT x MNPT
1/2"	E.CPP1QBQS0E	E.CPP1QBQS0L	E.CPP1QBQS0H
3/4"	E.CPP1QBQS0F	E.CPP1QBQS0M	E.CPP1QBQS0I
3/4" Large	E.CPP1QBQS1F	E.CPP1QBQS1M	E.CPP1QBQS1I
1"	E.CPP1QBQS1G	E.CPP1QBQS1N	E.CPP1QBQS1J
1-1/4"	E.CPP1QBQS2P	E.CPP1QBQS2K	E.CPP1QBQS2S
1-1/2"	E.CPP1QBQS2Q	E.CPP1QBQS2W	E.CPP1QBQS2T
2"	E.CPP1QBQS3R	E.CPP1QBQS3Y	E.CPP1QBQS3U

NOTES:

- All inlet and outlet connections (including coil) are FNPT or SWT throughout package (no mixing of end connection types).
- Optional Extension Kit- includes cap and tube for insulation around handle, and appropriate number of extensions for PT/CPTA included in package. Add a "1" to the end of the model number to designate 1-1/2" insulation option and a "2" to the end of the model number to designate 2" insulation option.

QuickSet® Flow Rates (+/- 3%)

OUTLET SIZE	MODEL NO.	FLOW GPM ⁽¹⁾ AT 4 FT/SEC	C _v ⁽²⁾	GPM RANGE FOR 5"-100" W.C. ΔP (SET W/100" GAUGE)	GPM RANGE FOR 5"-300" W.C. ΔP (SET W/300" GAUGE)
1/2", 3/4"	QS0	3.8	0.39	0.15 – 0.67	0.15 – 1.16
			1.1	0.3 – 1.4	0.3 – 2.4
			2.5	0.6 – 2.8	0.6 – 4.6
			4.2	1.2 – 5.4	1.2 – 9.4
3/4"L	QS1	6.7	0.9	0.3 – 1.4	0.3 – 2.5
			1.9	0.6 – 2.8	0.6 – 4.9
			3.9	1.3 – 5.6	1.3 – 9.7
			7.0	2.6 – 11.5	2.6 – 19.9
1"	QS1	10.8	1.8	0.6 – 2.8	0.6 – 5.0
			3.8	1.3 – 5.6	1.3 – 9.7
			7.6	2.6 – 11.5	2.6 – 19.9
			12.2	3.9 – 17.3	3.9 – 30.0
1-1/4"	QS2	18.7	10.0	3.4 – 15.0	3.4 – 26.2
1-1/2"	QS2	25.4	21.8	7.2 – 32.3	7.2 – 55.9
			22.1	7.4 – 33.0	7.4 – 57.2
2"	QS3	41.9	54.7 ³	13.9 – 62.0	13.9 – 107.4
			105.2 ³	21.6 – 96.5	21.6 – 167.1

NOTES

¹ The generally accepted upper limit as recommended by ASHRAE to prevent pipe noise is 4 ft/sec.

² C_v's are used to calculate the permanent pressure drop. $PSID = (\text{Flow}/C_v)^2$. Use the Flow Curve for flow measurement.